


# 970lm/1250lm

## Slim First - 15W



<b>Ref</b>	<b>: 12133B</b>	<b>12134B</b>
<b>Consommation/Power</b>	<b>: 15 W</b>	15 W
<b>Lumens</b>	<b>: 970 lm</b>	1250 lm
<b>CCT</b>	<b>: 3000K</b>	4000K
<b>Led</b>	<b>: EPISTAR</b>	EPISTAR
<b>Angle/Beam angle</b>	<b>: 120°</b>	120°
<b>IRC/CRI</b>	<b>: 80</b>	80
<b>IP / IK</b>	<b>: IP 20 / -</b>	IP 20 / -
<b>Fil Incand./Glow wire</b>	<b>: 650°C</b>	650°C
<b>Dimmable</b>	<b>: No</b>	No
<b>Dim. Coupe /Hole dim.</b>	<b>: Ø178mm</b>	Ø178mm
<b>Dimensions</b>	<b>: Ø190 x 25mm</b>	Ø190 x 25mm
<b>Voltage</b>	<b>: 200 - 240V</b>	200 - 240V
<b>Normes</b>	<b>: CE 60598-2-1</b>	CE 60598-2-1

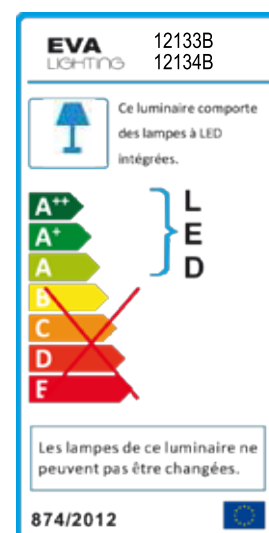

# 1360lm/1420lm

## Slim First - 18W



<b>Ref</b>	<b>: 12143B</b>	<b>12144B</b>
<b>Consommation/Power</b>	<b>: 18 W</b>	<b>18 W</b>
<b>Lumens</b>	<b>: 1360 lm</b>	<b>1420 lm</b>
<b>CCT</b>	<b>: 3000K</b>	<b>4000K</b>
<b>Led</b>	<b>: EPISTAR</b>	<b>EPISTAR</b>
<b>Angle/Beam angle</b>	<b>: 120°</b>	<b>120°</b>
<b>IRC/CRI</b>	<b>: 80</b>	<b>80</b>
<b>IP / IK</b>	<b>: IP 20 / -</b>	<b>IP 20 / -</b>
<b>Fil Incand./Glow wire</b>	<b>: 650°C</b>	<b>650°C</b>
<b>Dimmable</b>	<b>: No</b>	<b>No</b>
<b>Dim. Coupe /Hole dim.</b>	<b>: Ø210mm</b>	<b>Ø210mm</b>
<b>Dimensions</b>	<b>: Ø225 x 25mm</b>	<b>Ø225 x 25mm</b>
<b>Voltage</b>	<b>: 200 - 240V</b>	<b>200 - 240V</b>
<b>Normes</b>	<b>: CE 60598-2-1</b>	<b>CE 60598-2-1</b>

